MUTOH ECO-SOLVENT PRINTER



1682SR Pro DUAL-PRINTHEAD



The **MUTOH XpertJet 1682SR Pro** 64-inch Eco-Solvent Printer is equipped with staggered dual AccuFine HD printheads that provide ultra-fast print speeds. It's capable of producing smooth gradations while delivering high-quality printing, even with reduced resolutions, thanks to the optional 8-color (CMYKLcLmLkOr) ink configuration.

Built for Professionals, the **XPJ-1682SR Pro** is packed with features such as Dropmaster 2 (automatic bi-directional alignments), Feed Master (automatic PF adjustment), Automatic Nozzle Checking Unit option with Nozzle Area Select (continuous printing), i-screen print effects (banding mitigation), and Media Tracker (roll remainder tracking), among other cutting-edge improvements brought on by the original XpertJet line.

The **XPJ-1682SR Pro** includes VerteLith[™] Genuine RIP Software, bundled with FlexiDESIGNER MUTOH Edition 21 for the ultimate balance of speed and quality.









WRAPS

SIGNAGE

WALL COVERINGS

BANNERS

MUTOH XpertJet 1682SR Pro

NEW ACCUFINE HD PRINTHEAD

IMPROVED

DRYER SYSTEM



AUTOMATIC ALIGNMENTS

INTERNAL LED LIGHTING


www.MUTOH.com | 1-800-99MUTOH f ♥ ◎ in 🖸



POWERED BY VERTELITH ™ RIP SOFTWARE



MUTOH'S GENUINE RIP SOFTWARE BUNDLED WITH FLEXIDESIGNER MUTOH EDITION 21

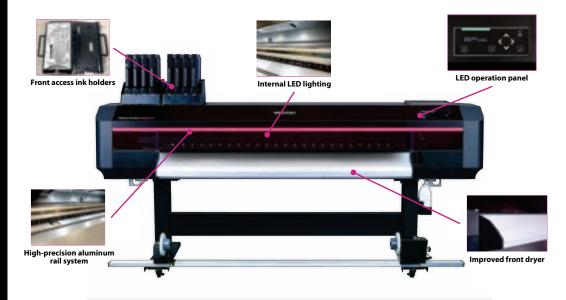

- High-precision aluminum rail system for high quality and stable printing.
- Ease-of-use with front access ink holders, side mounted LAN and power plugs, and LED operation panel.
- New AccuFine HD printheads provide faster speeds with exceptional quality.
- Built-in sensors for operator-driven automatic bi-directional and page feed alignments.
- Improved front dryer system for 20% faster ink dry times.
- Updated media flanges and media feeding mechanism allow for easy loading and page feed.
- Internal LED lighting for unobstructed print viewing and maintenance access.
- Includes the MUTOH Status Monitor (MSM) companion software for convenience and efficiency.













XPERTJET 1682SR PRO SPECIFICATIONS

Printing method	Drop-on-demand Micro Piezo Inkjet Technology
Printhead height	Four-level adjustment: 1.5mm, 2.0mm, 2.5mm, 4.0mm
Printhead	2 (staggered)
Max print resolution	1200x1200 dpi (1200/900/600/300 dpi print modes)
Media width	64 in
Media capacity	ø 5.9" dia / 2" & 3" cores /Roll media 66lbs or less
Max media thickness	Low1 0.3mm, Low2 0.8mm, Mid. 1.3mm, High 2.8mm
Max printable width	63.58 in
Max print speed	1,225 sqft/hr (300x600 dpi)
Take-up system	VJ16/19-TUP30 66lb take-up included (other options available)
RIP software	VerteLith™, bundled with FlexiDESIGNER MUTOH Edition 21

	Ink	Туре	MS41 Eco-Solvent ink
		Ink Set	4 color (CMYK) 8 color (CMYKLcLmLkOr)
-		Volume	1 L ink bags (300mL bag for Orange)
4		No. of slots	8

Interface	Gigabit-Ethernet (1000BASE-T)
Power Requirements	AC 100-120V± 10%, 50/60Hz ± 1Hz
Printable Environment	Temperature: 68-89.6°F Humidity: 40-60%RH (non condensing) Rec. environment: Temperature: 71.6-86°F
Power Consumption	Main: Operation status 1100W or less Standby: 30W or less
Dimensions (WxDxH)	Printer including stand: 109.05"x35.23"x56.22" cover closed
Weight	Body: 310lb Stand: 70.54lb